



# SHE



Ton. 11,0 - 25,0

ROTTAME  
SCRAPS  
MACERIE  
RUBBLES  
RIFIUTI  
WASTE MATERIALS




Rotatore a ralla incassato  
Il rotatore a ralla GRI incassato nel basamento, permette di ridurre notevolmente l'altezza della benna a polipo.  
GRI slewing ring rotator is included in the body and allows to reduce a lot the height of polyp grab.




Robusti carter proteggono i componenti idraulici da colpi e da intrusioni di materiali.  
Occorrono non più di 10' per sostituire un tubo flessibile in caso di scoppio !  
Strong carters protect the hydraulic components from blows and intrusion of materials.  
They are necessary not more than 10' to change a flexible tube in case of breakage!



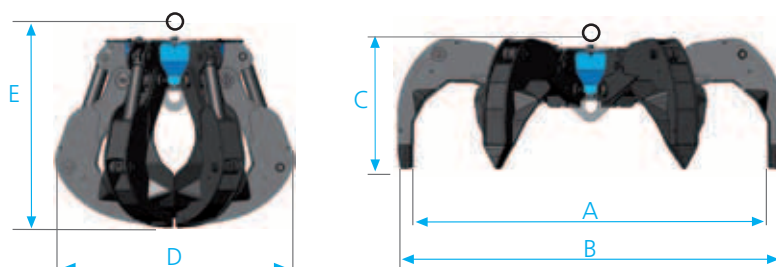

Tipo di attacchi disponibili  
Type of link

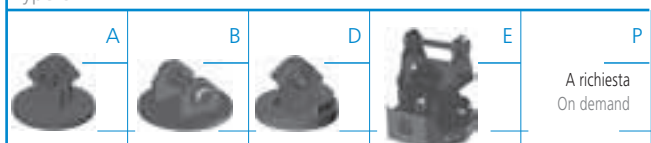

Tipo pale disponibili  
Type of teeth



Modello Model	Tipo attacco Type of link	Pale disponibili Teeth available	Capacità Capacity		Portata Load	Pressione Pressure	Pale Teeth	Dimensioni Dimensions	Dimensioni Dimensions				
			Lt.	Kg.					Max Bar	N.	Ton.	A	B
SHE 355	A/B	0	350	757	3,5	300	5	11-16	1850	2020	818	1400	1100
SHE 355	D	0	350	775	3,5	300	5	11-16	1850	2020	893	1400	1176
SHE 355	E (10 TON)	0	350	781	3,5	300	5	11-16	1850	2020	1394	1400	1324
SHE 356	A/B	0	350	866	3,5	300	6	11-16	1850	2020	818	1400	1100
SHE 356	D	0	350	887	3,5	300	6	11-16	1850	2020	893	1400	1176
SHE 356	E (10 TON)	0	350	893	3,5	300	6	11-16	1850	2020	1394	1400	1324
SHE 505	A/B	0	500	858	5	300	5	15-25	2000	2175	803	1394	1190
SHE 505	D	0	500	876	5	300	5	15-25	2000	2175	878	1394	1275
SHE 505	E (10 TON)	0	500	883	5	300	5	15-25	2000	2175	1005	1394	1390
SHE 506	A/B	0	500	976	5	300	6	15-25	2000	2175	803	1394	1190
SHE 506	D	0	500	994	5	300	6	15-25	2000	2175	878	1394	1275
SHE 506	E (10 TON)	0	500	1123	5	300	6	15-25	2000	2175	1005	1394	1390

I pesi si intendono con pala "0" tipo standard  
The weights refer to standard teeth type "0"

Peso escavatore  
Excavator weight

Dato indicativo  
Indicative data

#### ACCESSORI - OPTIONS



Valvola di blocco ICVS  
ICVS check valve



Controllo attivo della presa  
Active Control Grip



Staffa basculante per escavatori dal peso  
Suspension for excavators weight

Ton. 10-25